




HAND LAMP



Technical data

Type	H-251-A
Certificate	BAS 00 ATEX 2176
Standards	EN 50014, EN 50019, EN 50020, EN 50028
Type of protection	II 2 GD Eex ib IIC T4
Degree of protection	IP 66
Permissible ambient temperature	-20° to +40 °C
Enclosure	Thermoplastic, anti-static
Halogen lamp	3,75 V; 2,8 W
Battery	4 V
Capacity	5 Ah
Weight	1,75 kg
Car battery charger	C-251LV
Mains battery charger	C-251HV
Operation time (one charging)	7 h

Dimensions

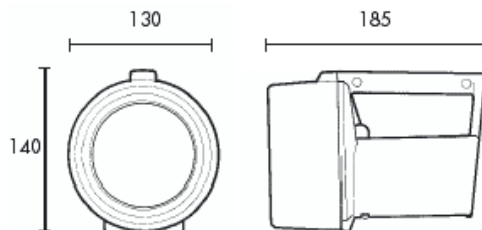

Polar curve

