




MOTOR'S TERMINALS



Technical data	Type 07-9811-1620	Type 07-9811-1 640	Type 07-9811-1670
Certificate	IBExU00ATEX1052 U	IBExU00ATEX1052 U	IBExU00ATEX1052 U
Type of protection	II 2G EEx e II, I M2 EEx e I	II 2G EEx e II, I M2 EEx e I	II 2G EEx e II, I M2 EEx e I
Degree of protection	IP 00	IP 00	IP 00
Rated voltage	690 V	690 V	690 V
Rated current	16 A	34 A	100 A
Connection terminals	up to 2,5 mm ²	up to 4 mm ²	Up to 16 mm ²
Working temperature	from - 40 to + 135 °C	from - 40 to + 135 °C	from - 40 to + 135 °C

Dimensions:

TYPE OF CONNECTIONS:

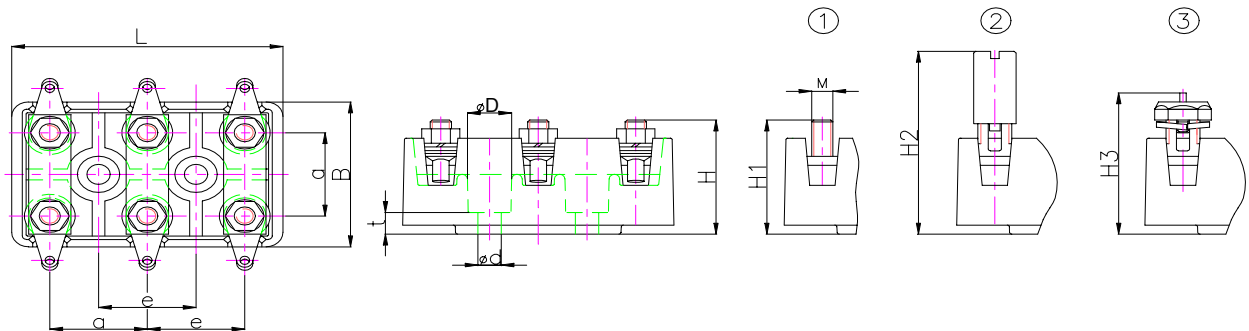

Tip	•	B	H	H1	H2	H3	a	e	M	Ød	ØD	t
07-9811-...620	54	34	31	31	50	37	20	20	M4	5,5	10	7
07-9811-...640	64	40	32	32	50,5	39	23	23	M5	5,5	10	6
07-9811-...670	96	60	46	46	-	57	35	35	M8	9	15	12

Order example: 07-9811-...670

_____ Type of connections: 1 - standard
 2 - on special request
 3 - on special request