




# VESSEL LIGHT FITTING

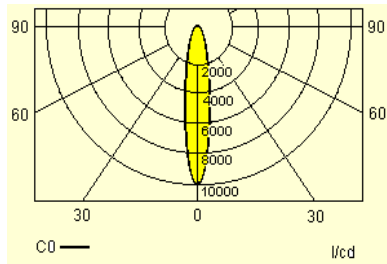


Luminous flux distribution curve

Technical data	
KFL 50 TIM	
Type of protection	II 2 G EEx de IIC T3, T4 for zone 1 and 2
Certificate	LOM 02 ATEX 2035
Enclosure material	Copper-free aluminium
Rated voltage	230V ± 10%, 50 Hz
Degree of protection	IP 67
Insulation class	I
Ambient temperature	-20 °C to +40 °C
Cable entries	1 x M25x1,5 1 x plug M25x1,5
Connection terminals	L, N: 2x4 mm <sup>2</sup> PE connection, internal and external 6mm <sup>2</sup>
Lamp	Halogen reflector lamp 12V / 20W or 50W Socket BA 15d
Weight	approx. 3kg

Ordering details	
KFL 50 TIM	
Type	Order No.
KFL 20 TIM	NOR 000 005 140 701 – 20W
KFL 50 TIM	NOR 000 005 140 701

Lamp	
KFL 50 TIM	
Type	Order No.
Halogen-reflector lamp 12V / 20W	3 2369 100 002
Halogen-reflector lamp 12V / 50W	3 2369 100 001

➤ For windows in acc. with DIN 28120

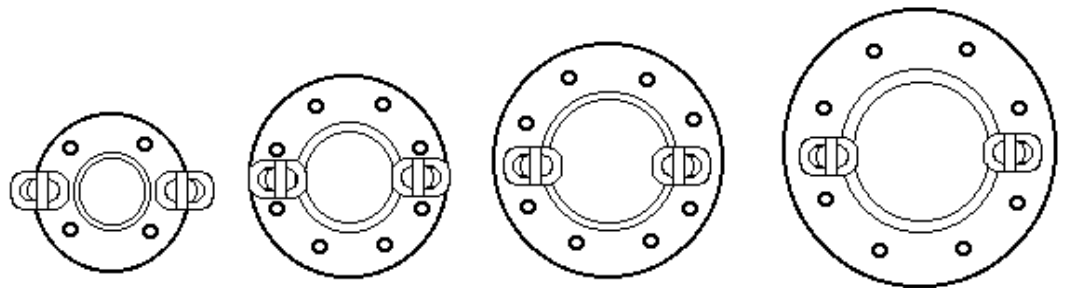

Nominal width  
NW 40/50

NW 80

NW100

NW 125

➤ Dimensions

