



FLUORESCENT LIGHT FITTINGS FOR CLEAN ROOMS IN PHARMACY




Technical data

Certificate	DMT 02 ATEX 069
Type of protection	II 2 G EEx de IIC T4
Degree of protection to EN 60529	IP 66
Protection class	I
Rated voltage	AC: 110 – 254 V; ± 10% DC: 220V +25%/-20%
Permissible ambient temperature	-20 °C to + 50 °C
Circuit	EVG
Battery	Only for 2x18W and 2x36W Vgradnja ločeno od svetilke
Emergency lighting operation	1-lamps 1,5 h or 3h, can be set on site


Lamps: Bi-pin lamp (socket G13)

Power	Circuit	Order code
2 x 18	EVG	1 2190 218 001
2 x 36	EVG	1 2190 236 001
2 x 58	EVG	1 2190 258 001
2 x 18 - NI	EVG	1 2190 218 001 NI
2 x 36 - NI	EVG	1 2190 236 001 NI

Dimensions

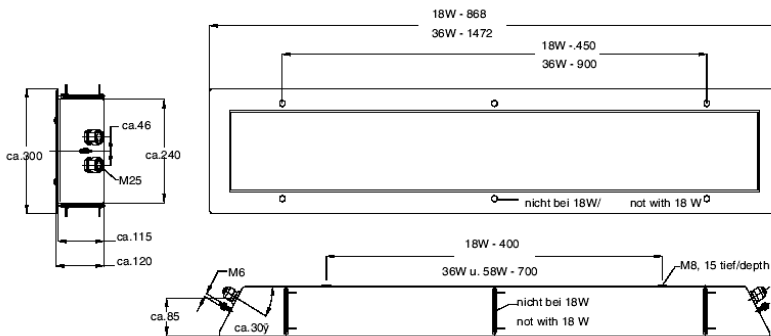

Polar curve -2 lamps
Light efficiency: 72 %

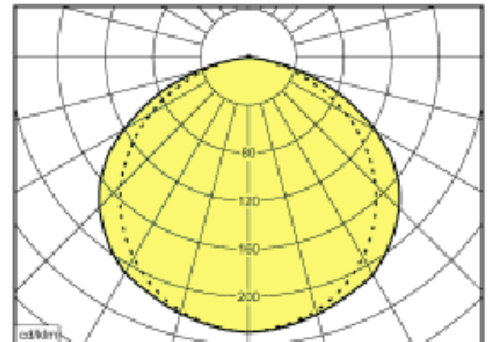

Ceiling cut-off

