


TELEPHONE

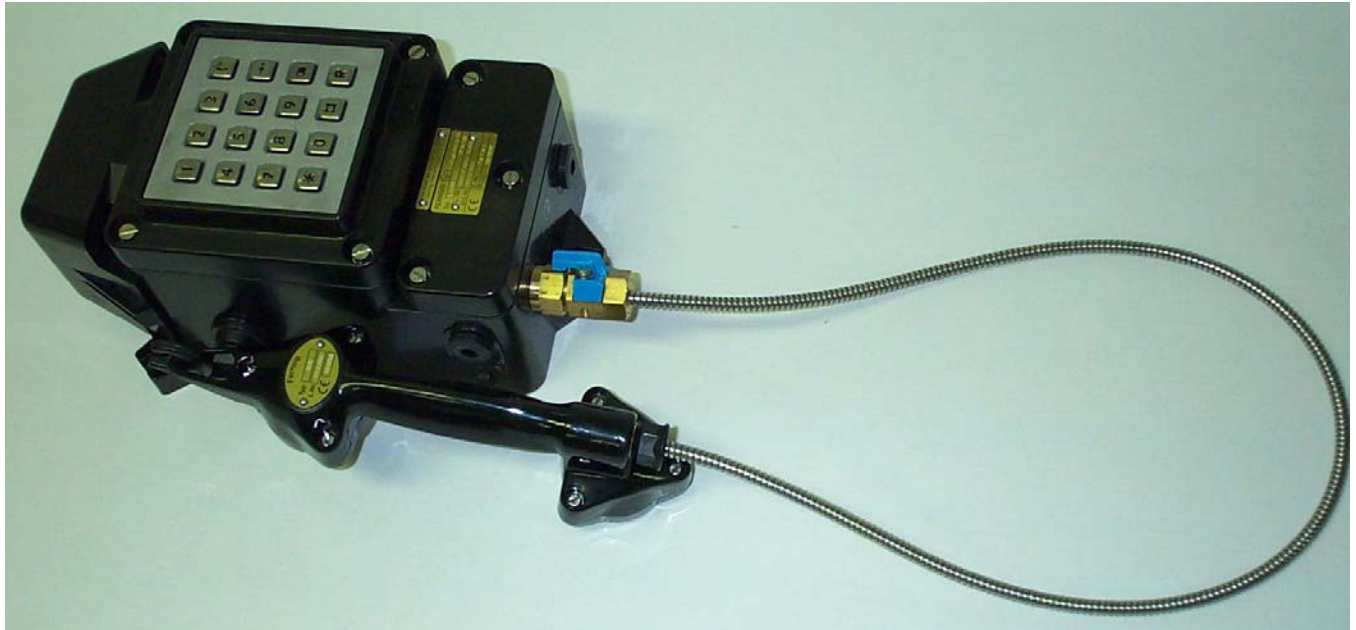

Technical data

Type	5100 / 4T -for EEx II 5100 / 5T -for EEx I
Certificate	BVS 98.D.2045 , SIQ Ex...
Type of protection	EEx dem [ib] IIC , EEx dem [ib] I
Degree of protection	IP 66
Line voltage	24V _{DC} ...66V _{DC}
Current	20 mA...100 mA
Ringing voltage	30 V _{eff} ...90 V _{eff}
Ringing frequency	16 Hz...55 Hz
Sounder	10 different call tones can be selected through the keypad
Ringer output	90 dB (A) in 1m distance
Housing	reinforced polyester
Weight	approx. 5,3 kg

Dimensions

